

Product Data Sheet



145X992

Replace "X" with 1, 2 or 3 for number of poles

Power Distribution Block 760 Amps, 600 Volts (AC/DC)



Wire Range:

Line side: (2) 500 kcmil - #4 AWG

Load Side: (12) #2 - #14 AWG

[See tables below for SCCR wire ranges, flexible stranded and multiple wire approvals](#)

Electrical Ratings:

- 760A copper wire (Based on NEC Table 310-16, 75°C columns)
- 600 Volts AC/DC (UL 1059 Class C, User Group - General Industrial)
- Factory and Field Wiring

Short Circuit Current Ratings (Copper wire only):

Suitable Conductors (kcmil/AWG)		Overcurrent Protection Fuse Required Class/Max Amp Rating						SCCR, RMS SYM Amps	Volts Max
Line	Load	J	T	RK1	RK5	G	CC		
500 - 250	2 - 8	600	600	600				50,000	600
500 - 250	2 - 8	400	400	400	200	60	30	100,000	600
4/0 - 4	2 - 14	600	600					50,000	600
4/0 - 4	2 - 14	400	400	400	200	60	30	100,000	600

Mechanical Ratings:

- Maximum insulator base temperature: 150 °C (302 °F) UL RTI
- Storage and transportation temperature range: -35 °C to 125 °C (-31 °F to 257 °F)
- Flammability rating of insulator base: UL 94 V-0


* Use outside these ratings needs to be judged in the end-use application.

Materials:

- Connector: Copper, tin plated
- Insulator base: phenolic
- Terminal set screws: Aluminum, tin plated and Steel, nickel plated
- Connector mounting screws: Steel, zinc plated

Agency Approvals:

- UL Recognized, UL 1059 Terminal Block Standard, File No. XCFR2.E62806
- CSA Certified, CSA C22.2 No. 158, File No. LR19766 (Wire Classes B & C only)
- CE compliant to IEC 60947-7-1
- RoHS Compliant




Wire Approvals:

Line Side Wire Approvals:

		Copper Wire Stranding Classes - Number of Strands						
Wire Size	Torque	Solid	Class B	Class C	Class G	Class H	Class I	Class K
500 kcmil	375 in. lbs		37	61				
400	375 in. lbs		37	61	~ 259	~ 427	~ 980	
350	375 in. lbs		37	61	~ 259	~ 427	~ 882	~ 3458
300	375 in. lbs		37	61	~ 259	~ 427	~ 735	~ 2989
250	375 in. lbs		37	61	~ 259	~ 427	~ 637	~ 2499
4/0	375 in. lbs		19	37	~ 133	~ 259	~ 532	~ 2107
3/0	375 in. lbs		19	37	~ 133	~ 259	~ 418	~ 1666
2/0	375 in. lbs		19	37	~ 133	~ 259	~ 342	~ 1323
1/0	375 in. lbs		19	37	~ 133	~ 259	~ 266	~ 1064
1	375 in. lbs		19	37	~ 133	~ 259	~ 210	~ 836
2	375 in. lbs		7	19	~ 49	~ 133	~ 161	~ 665
4	375 in. lbs		7	19				

~Quantity of strands for Classes G, H, I, K may vary by manufacturer.



Load Side Wire Approvals:

		Copper Wire Stranding Classes - Number of Strands						
Wire Size	Torque	Solid	Class B	Class C	Class G	Class H	Class I	Class K
2 AWG	50 in. lbs		7	19				
4	45 in. lbs		7	19	~ 49	~ 133	~ 105	~ 420
6	45 in. lbs		7	19	~ 49	~ 133	~ 63	~ 266
8	40 in. lbs		(1-2)* 7	(1-2)* 19	~ 49	~ 133	(1-2)* ~ 41	(1-2)* ~ 168
10	35 in. lbs	1	(1-2)* 7	(1-2)* 19			(1-2)* ~ 27	(1-2)* ~ 104
12	35 in. lbs	1	(1-4)* 7	(1-4)* 19			(1-2)* ~ 19	(1-2)* ~ 65
14	35 in. lbs	1	(1-4)* 7	(1-4)* 19			(1-2)* ~ 19	(1-2)* ~ 41


~Quantity of strands for Classes G, H, I, K may vary by manufacturer.

* Multiple conductor approvals for **LOAD** side only. (copper wire only)

- Wire strip length, line side tap – 1 5/8”
- Wire strip length, load side tap, top row – 5/8”, bottom row – 1.0”
- Hex keys required: line side - 3/8”, load side – slotted
- Panel mountable: 1/4” (M6) fastener, torque to 30 - 40 in. lbs.

Accessories:

- Cover: Clear protective plastic cover. Catalog description CC145X ("X" numbers of poles: 1,2 or 3)
- Marking strip: White vinyl strip to mark circuits. Supplied with mounting screws.
- Printing available. Consult factory.

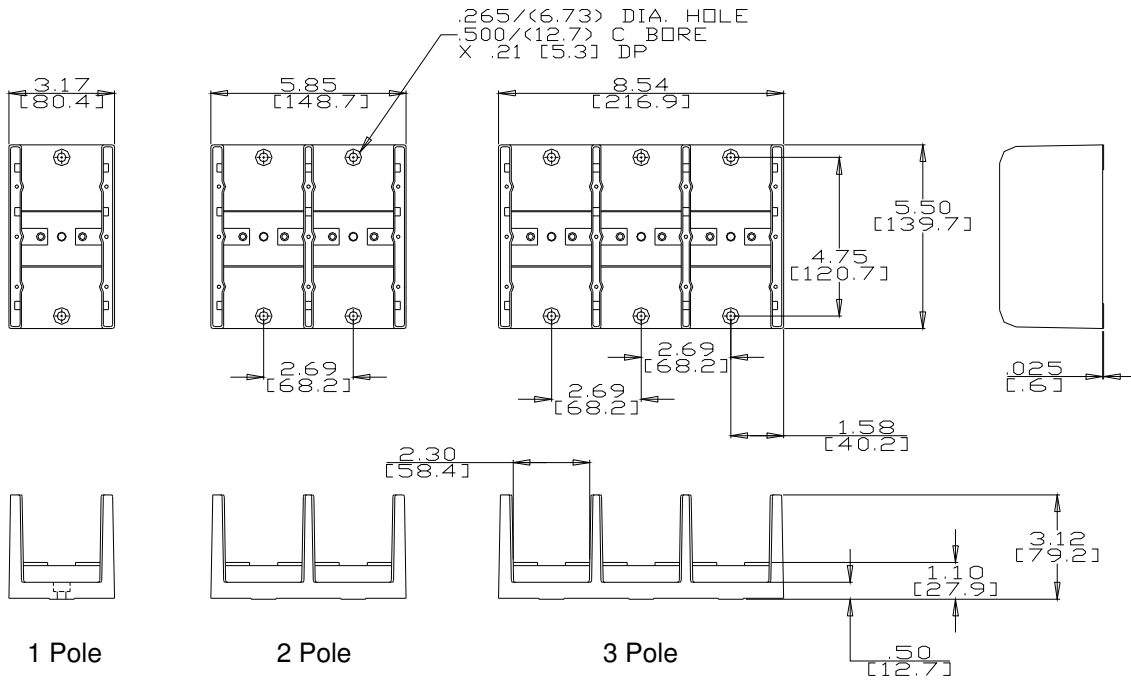

WWW.MARATHONSP.COM
1-419-352-8441