

Product Data Sheet



985 GP XX

Replace XX with 02 thru 12 for number of poles

985 Series

Deadfront Type

85 Amps, 600 Volts AC/DC



Wire Range:

#4 - #18 AWG Copper Wire Only

Electrical Ratings:

- 85A (Based on NEC Table 310-16, 75°C columns)
- 600 Volts AC/DC (UL 1059 Class C, Use Group - General Industrial)
- Short Circuit Current Rated for 10,000 Amps.
- Factory and Field Wiring

Mechanical Ratings:

- Insulator base temperature rating: -40°C/F to 150°C (302°F) UL RTI
- Flammability rating of insulator base: UL 94 V-0
 - Use outside these ratings needs to be judged in the end-use application.

Materials:

- Connector: High conductivity aluminum, tin plated
- Insulator base: phenolic
- Terminal set screws: Steel, tin plated

Agency Approvals:

- UL Recognized, UL 1059 Terminal Block Standard, File No. XCFR2.E47811
- CSA Certified, CSA C22.2 No. 158, File No. LR19766
- CE compliant to IEC 60947-7-1
- RoHS Compliant

Wire Approvals:

Wire Size	Torque	Copper Wire Stranding Classes - Number of Conductors		
		Solid	Class B	Class C
4	16 in. lbs		1	1
6	16 in. lbs		1	1
8	16 in. lbs		1 or 2*	1 or 2*
10	16 in. lbs	1 to 4*	1 to 4*	1 to 4*
12	16 in. lbs	1 to 4*	1 to 4*	1 to 4*
14	16 in. lbs	1 to 6*	1 to 6*	1 to 6*
16	16 in. lbs	1 to 6*	1 to 6*	1 to 6*
18	16 in. lbs	1 to 8*	1 to 8*	1 to 8*

*If using two or more conductors, they must be the same size

- Wire strip length – 9/16”

Mounting:


- Panel mountable:
- #10 fastener
- Torque to 25-30 in. lbs.

Accessories:

- Printing Available on Marking Strip



Consult customer service for custom printed applications

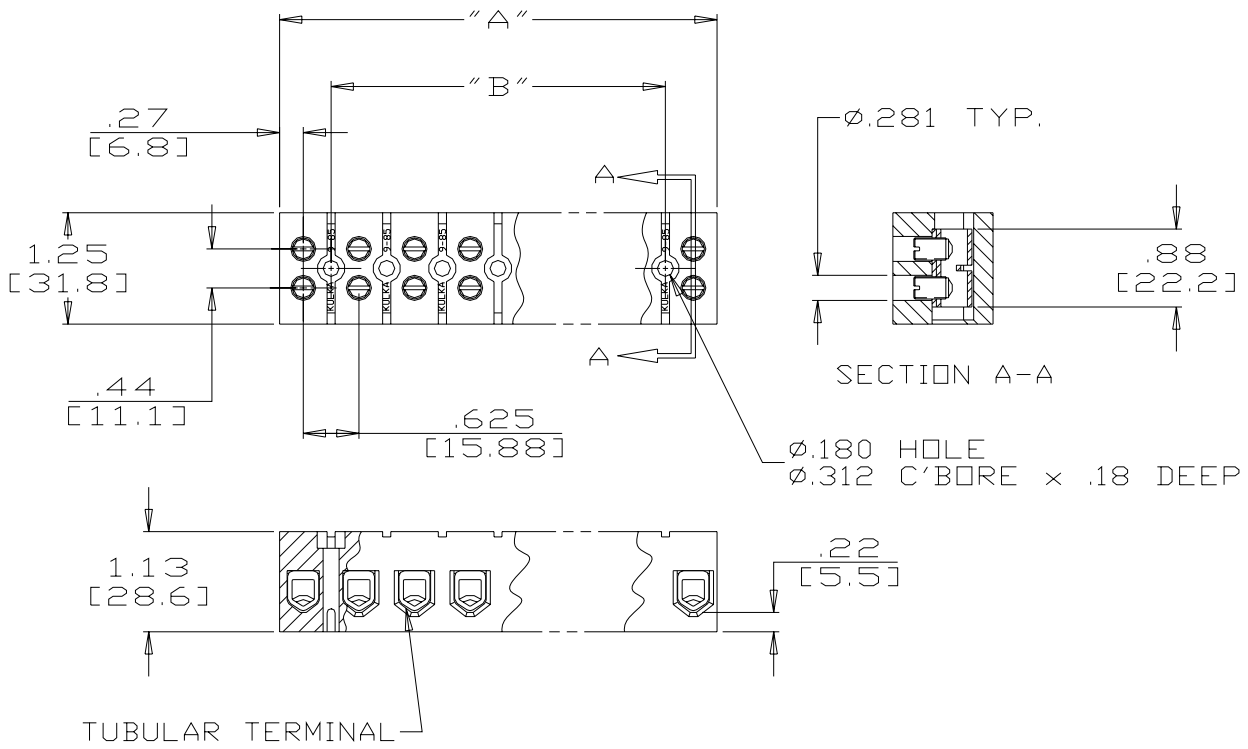

Catalog #	# of Poles	A	B
985 GP 02	2	1.16	N/A
985 GP 03	3	1.78	0.63
985 GP 04	4	2.41	1.25
985 GP 05	5	3.03	1.88
985 GP 06	6	3.66	2.50
985 GP 07	7	4.28	3.13
985 GP 08	8	4.90	3.75
985 GP 09	9	5.53	4.38
985 GP 10	10	6.15	5.00
985 GP 11	11	6.78	5.63
985 GP 12	12	7.40	6.25

WWW.MARATHONSP.COM
1-419-352-8441