

# Product Data Sheet



## HX0Q2F

Replace "X" with 2, 3, 4, 5 or 6 for number of poles

### Class H/K Fuse Panel 60 Amps, 250 Volts AC/DC

#### Wire Range:

- #2/0 - #14 AWG Copper
- #2/0 - #14 AWG Aluminum

[See table below for wire sizes.](#)

**Holds fuse size 13/16" diameter X 3"**

Commonly used fuses in this holder: A2Y, CRN, NLN, NON, NRN, OT, OTN, RLN, RF

#### Electrical Ratings:

- 31 - 60A max (amperage rating based on maximum fuse rating for that physical size)
- 250 Volts AC/DC
- Approved for 10,000 Amp Withstand Rating

#### Mechanical Ratings:


- Insulator base temperature rating: -40°C/F to 150°C (302°F) UL RTI
- Flammability rating of insulator base: UL 94 V-0

#### Materials:

- Fuse Clip: Copper alloy, tin plated
- Bus Bar: High conductivity aluminum, tin plated
- Insulator base: General Phenolic
- Terminal set screws: Aluminum, tin plated
- Connector mounting screws: Steel, zinc plated
- Bus Bar mounting screws: Steel, nickel plated

#### Agency Approvals:

- UL Recognized, Fuseholder standards UL 4248-1 and UL 4248-6.
- UL File No. IZLT2.E35113
- CSA Certified File No. LR21455
- CE compliant to IEC 60947-1
- RoHS Compliant

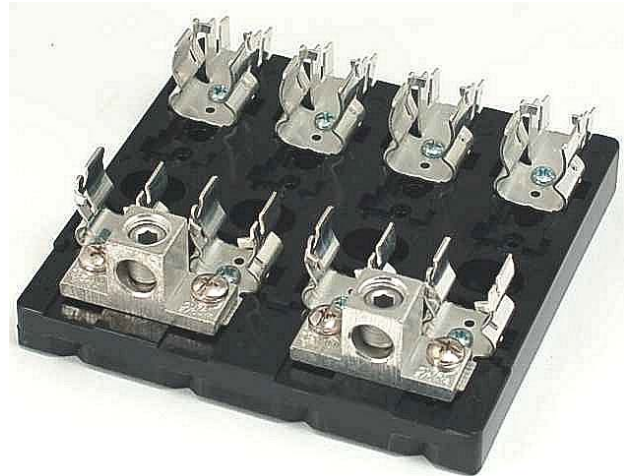

**Wire Approvals:**


Wire Size	Torque		Copper Wire Stranding Classes - Number of Conductors		
	N-m	In. lbs	Solid	Class B	Class C
2/0 AWG	13.6	120		1	1
1/0	13.6	120		1	1
1	13.6	120		1	1
2	13.6	120		1	1
4	13.6	120		1	1
6	13.6	120		1	1
8	4.5	40		1	1
10	4.0	35	1	1	1
12	4.0	35	1	1	1
14	4.0	35	1	1	1

Aluminum Stranded Wire Range: #2/0 - #14 AWG

- Wire strip length – 11/16"
- Hex key needed: 3/16"
- Panel mountable: #10 fastener, torque to 25-30 in. lbs.

**Accessories:**

Printing available: Consult customer service

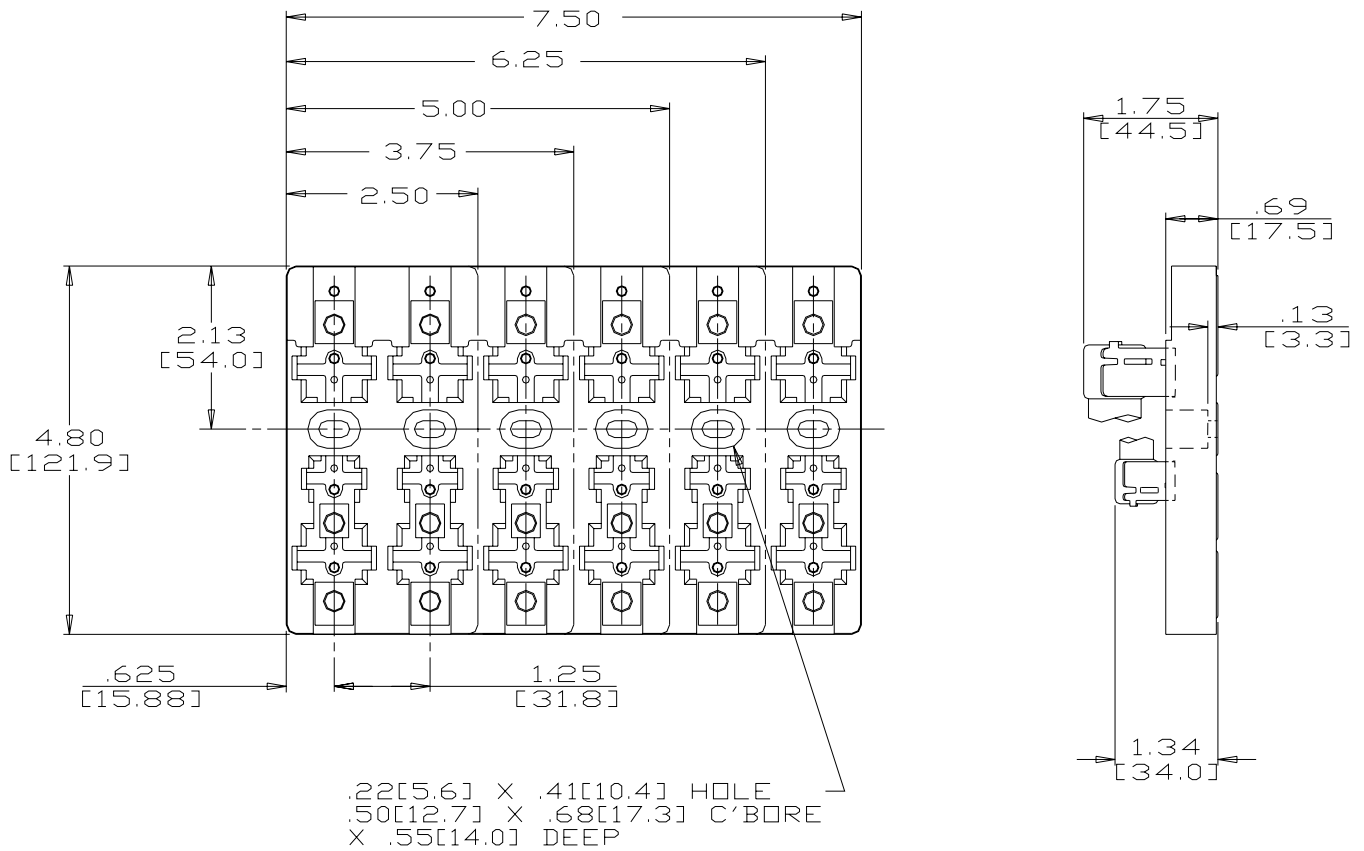

[WWW.MARATHONSP.COM](http://WWW.MARATHONSP.COM)  
1-419-352-8441