



# Class J Fuse Holders - 600 Volt *Bolt Down Construction*


## Highlights and Specifications:

- Connector, one piece aluminum, tin plated
- Base, phenolic board material, ANSI grade XPC, UL temperature rating of 130°C, UL flammability rating of 94-HB
- Tested & approved for 200,000 Amp withstand rating.
- Fuse mounting hardware supplied with fuse holder
- UL Listed File No. IZLT.E35113
- CSA Certified File No. LR21455
- CE




Catalog #	Poles	Amp	Base Materials	Wire Range	Fuse Size	Fuses	Figure #
6J200A1BFBD	1	200	Phenolic	250 kcmil - #6 AWG CU AL	1 5/8" DIA by 5 3/4"	A4J	FIG 1
6J200A3BFBD	3					AJT	
6J400A1BFBD	1	400		(1) 350 kcmil-#6 AWG CU AL (1) 600 kcmil-#2 AWG CU AL	2 1/8" DIA by 7 1/8"	JKS	FIG 2
6J400A3BFBD	3			JLS			
6J600A1BFBD	1	600		(2) 500 kcmil - #4 AWG CU AL	2 5/8" DIA by 8"	JTD	FIG 3
6J600A3BFBD	3					JTG_ID LPJ	


**Figure 1:**

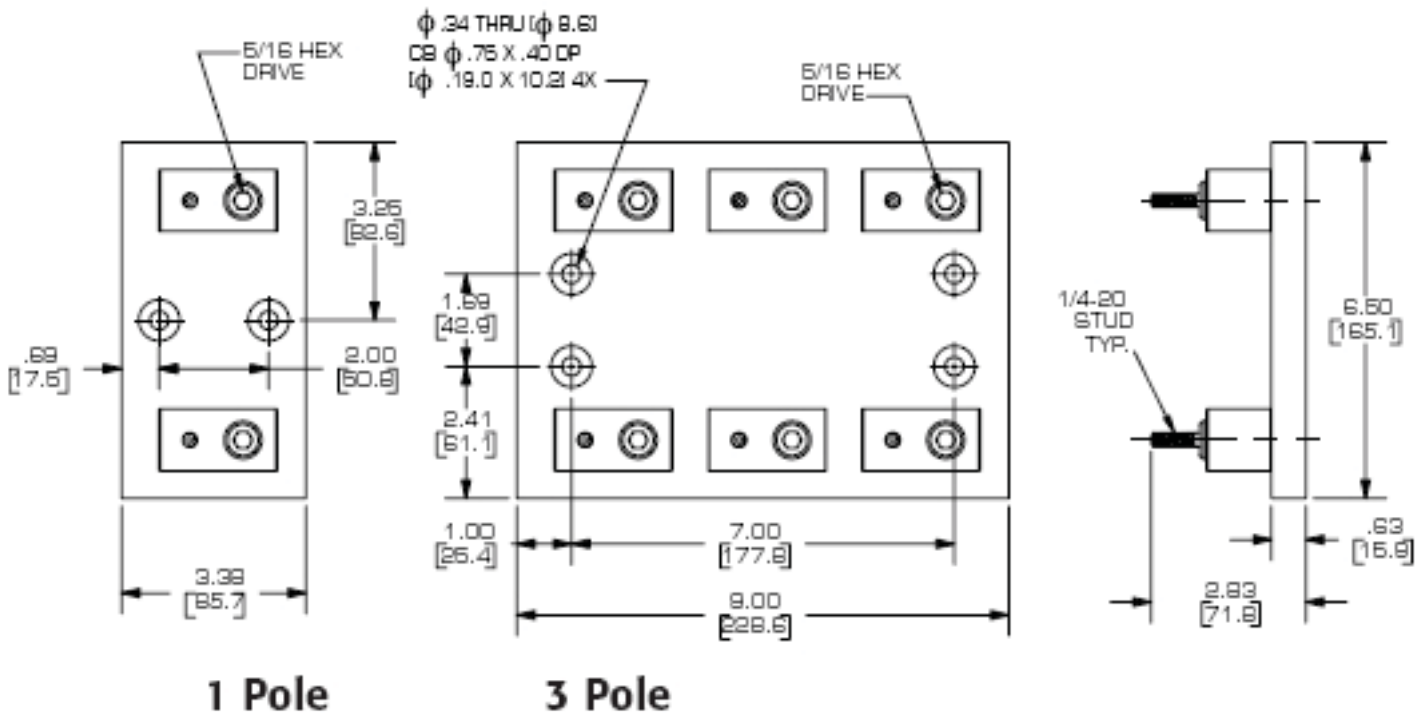

**Figure 2:**

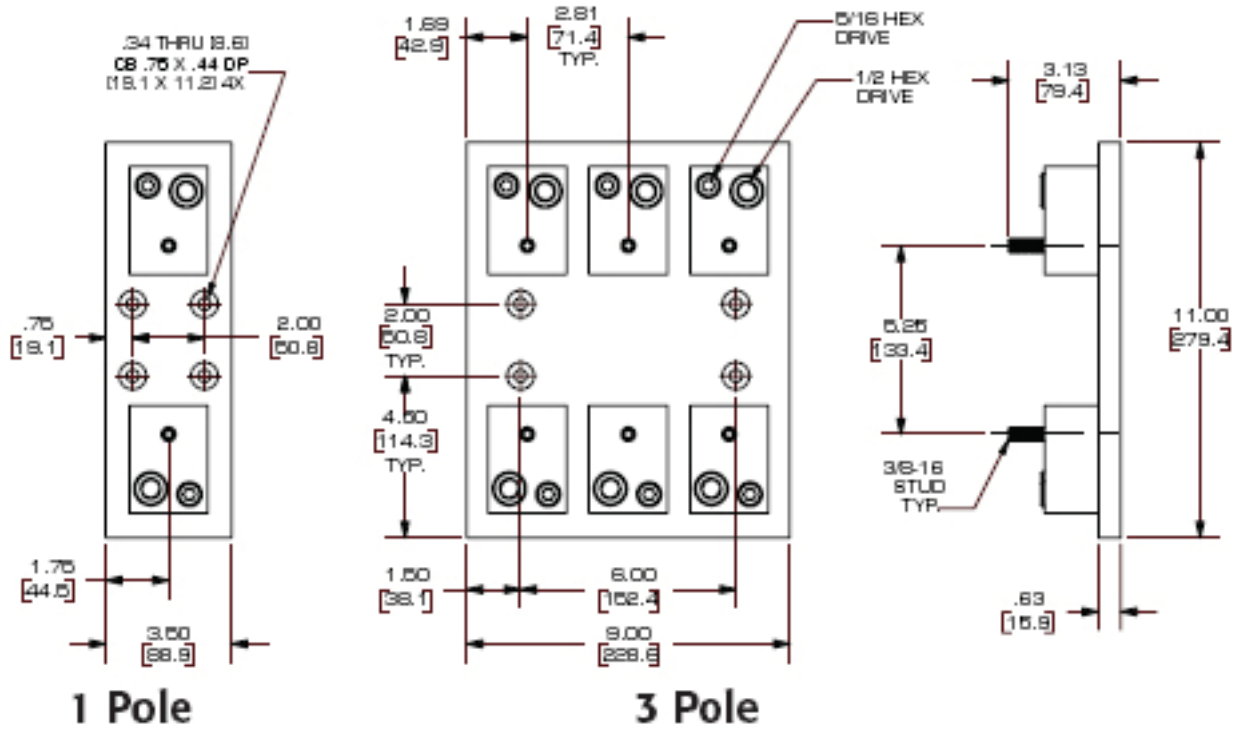

**Figure 3:**

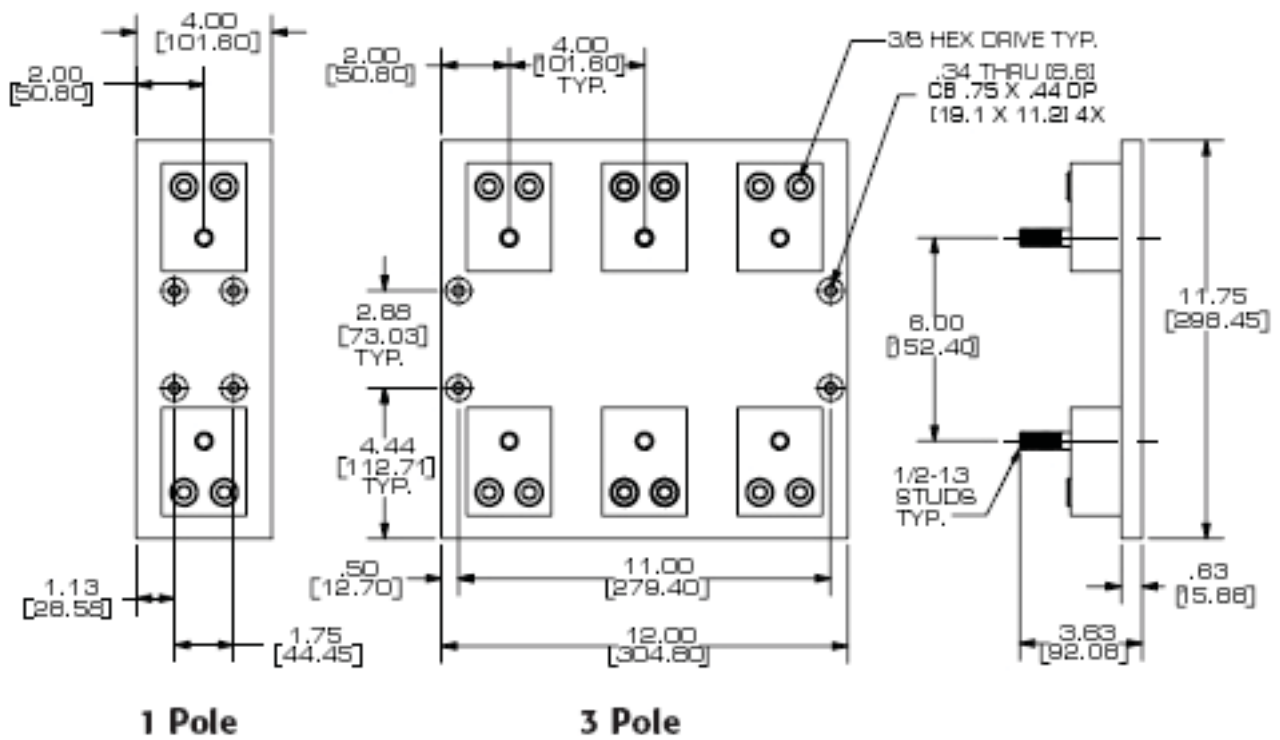

13300 Van Camp Road • P.O. Box 468 • Bowling Green, OH 43402  
Phone: (419) 352-8441 • Fax: (419) 352-0875

[www.marathonsp.com](http://www.marathonsp.com)