

## MARKING INSULATOR STRIPS - SUB-MOUNTED

Marking insulator strips serve as insulation between terminal blocks and chassis, as well as providing a marking surface for terminal identification. Printing is used to show terminal designations by numbers.

**ORDERING CODE:**

EXAMPLE:					
MS	671	XP	Blank	16	01A


STRIP TYPE	SERIES	MATERIAL <sup>(1)</sup>	FEED THRU <sup>(2)</sup> (IF APPLICABLE)	NUMBER OF TERMINALS	PRINT STYLE
MS	599 (799)	GME or XP	Y or blank	xx	01A (Printed 1,2,3...)  01X (Unprinted/Blank)
MS	600 (800)	GME or XP	Y or blank	xx	
MS	601 (801)	GME or XP	Y or blank	xx	
MS	602 (802)	GME or XP	Y or blank	xx	
MS	603	GME or XP	Y or blank	xx	
MS	604	GME or XP	Y or blank	xx	
MS	605	GME or XP	Y or blank	xx	
MS	621	GME or XP	Y or blank	xx	
MS	670	GME or XP	Blank	xx	
MS	671	GME or XP	Blank	xx	
MS	672	GME or XP	Blank	xx	
MS	699 (899)	GME or XP	Y or blank	xx	
MS	812 (912)	GME or XP	Y or blank	xx	

<sup>(1)</sup>MATERIAL INFORMATION:

XP: Paper/Phenolic Resin. Standard general purpose laminate. Flame Resistance - UL 94HB  
 GME: Glass/melamine, flame retardant. Military spec designation for NEMA grade G-9. Flame Resistance UL 94V0

<sup>(2)</sup>FEED-THRU STYLE INFORMATION

Insert applicable feed-thru style designation in ordering code (i.e. Y, YSY, XY, 1904, 1921, 2000, 2004, 2020, 2021, 2104, 2120 or 3000).

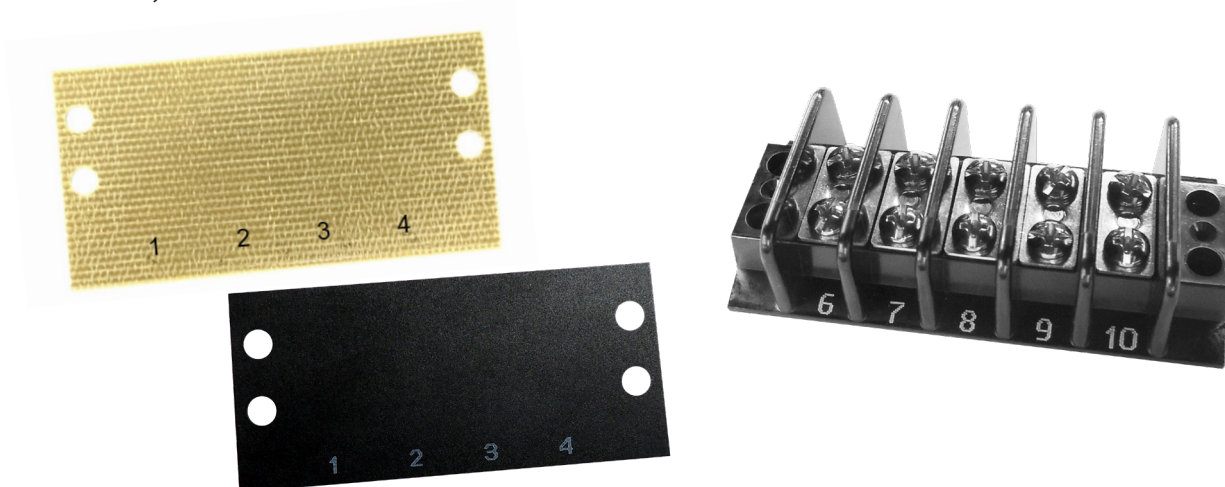

MARKING INSULATOR STRIP DIMENSIONS

SERIES	FIGURE #	C	D	E	F	X (DIA)	TEXT HEIGHT	FIGURE
599 (799)	2	0.81	n/a	0.28	0.14	0.16	0.13	2
600 (800)	1	1.13	0.31	0.29	0.14	0.16	0.13	1
601 (801)	1	1.31	0.42	0.34	0.16	0.18	0.13	1
602 (802)	1	1.50	0.50	0.41	0.20	0.21	0.13	1
603	1	1.88	0.63	0.59	0.22	0.23	0.13	1
604	1	2.13	0.75	0.63	0.27	0.23	0.13	1
605	1	2.69	0.88	0.81	0.31	0.27	0.13	1
621	1	1.88	0.42	0.51	0.16	0.18	0.13	1
670	1	1.19	0.31	0.28	0.14	0.16	0.13	1
671	1	1.50	0.42	0.34	0.16	0.18	0.13	1
672	1	1.63	0.50	0.41	0.20	0.21	0.13	1
699 (899)	2	0.88	n/a	0.56	0.16	0.18	0.13	2
812 (912)	2	0.94	n/a	0.37	0.20	0.21	0.06	2

Figure-1  
(Double Row)



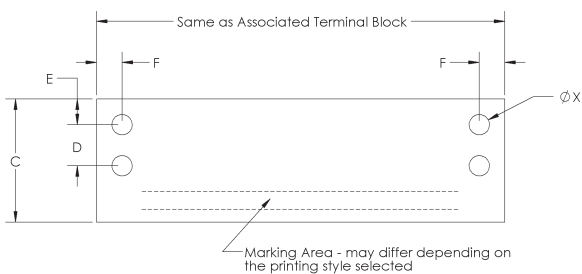


Figure-2  
(Single Row)

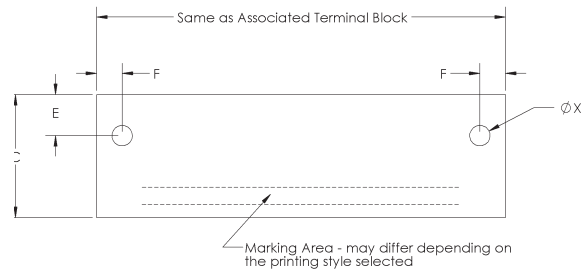


PRINTING:

- Maximum number of characters is two.
- Printing character is typically 1/8 inch tall.
- Printing color is
  - Black on beige surfaces (GME)
  - White on black surfaces (XP)
- Custom printing is available for high volume jobs (min. order qty of 1000)

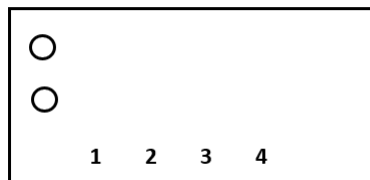

01A Printing

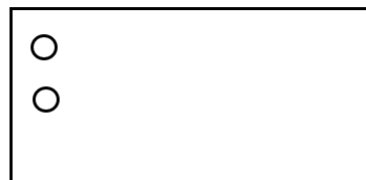

01X No Printing