

## Military Stud Class Terminal Block **10TBXXF**

Replace "XX" with 18 or 28 for number of poles.



### Wire Range

- For use with Listed Ring Fork or Spade Terminals

### Electrical Ratings

- 30 Amps, 60Hz
- 600 Volts RMS
- 2200 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

### Agency Compliance

- A-A-59125 / 16 , (supercedes MIL-T-55164 / 15)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

### Material Information

- Insulator base:
  - MAI-60 in accordance with MIL-M-14
- Stud #6-32 NC: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9201880)


## Termination Specifications

- Lug Information
  - MS17143 – 17
  - Maximum Lug Width : 0.242" (6.1 mm)
  - Recommended Torque: 10 – 12 in. lbs. (1.1 - 1.4 N·m)
  - Screw Size: #6

## Installation & Accessories

- Suggested product mounting hardware: #6 fastener, torque to be determined in end use application not to exceed 15 lb-in.

### Drawing

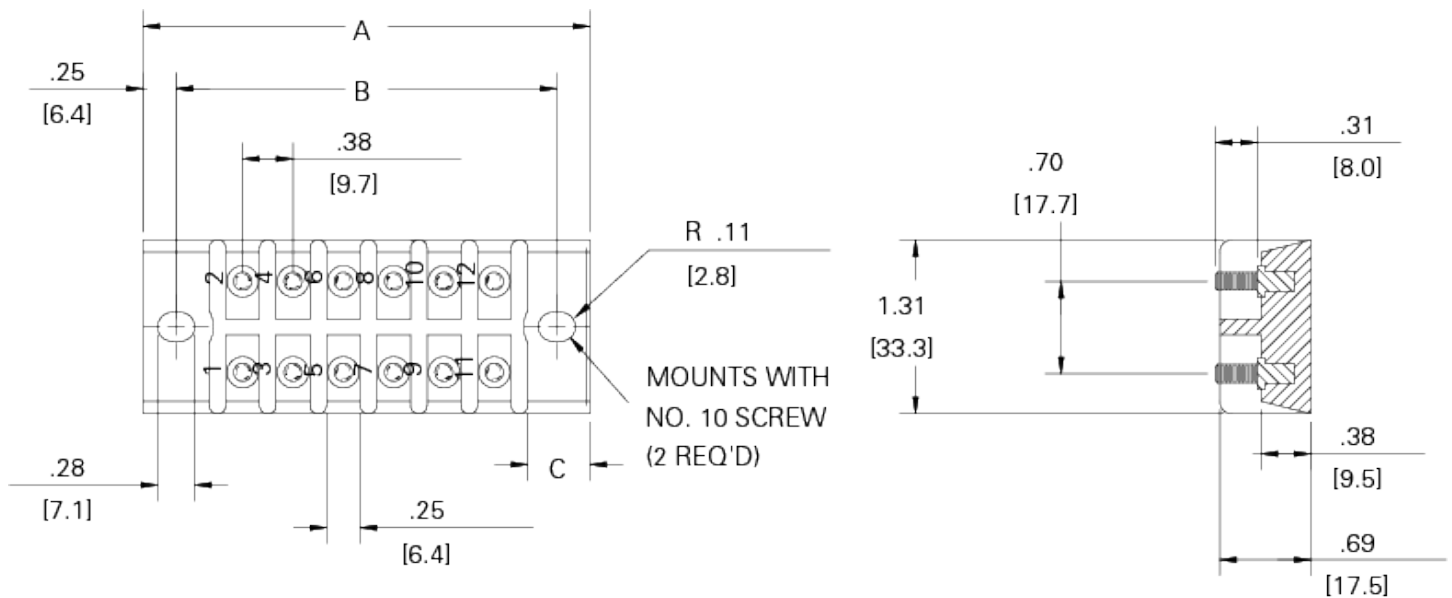

Catalog No.	Dimensions			No. Of Nuts
	A	B	C	
10TB18	4.63	4.13	.56	18
10TB28	6.50	6.00	.56	28