


Military Stud Class Terminal Block **11TBXXF**

Replace "XX" with 04, 06, or 14 for number of poles.

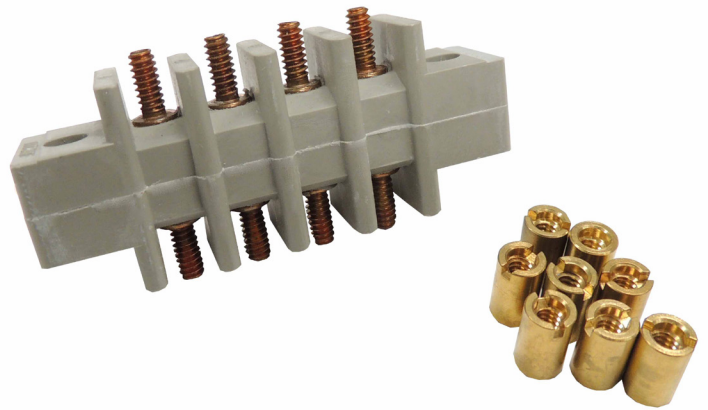

Wire Range

- For use with Listed Ring Fork or Spade Terminals

Electrical Ratings

- 40 Amps, 60Hz
- 600 Volts RMS
- 2200 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

Agency Compliance

- A-A-59125 / 17 , (supercedes MIL-T-55164 / 15)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

Material Information

- Insulator base:
 - MAI-60 in accordance with MIL-M-14
- Stud #6-32 NC: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9201880)


Termination Specifications

- Lug Information
 - MS17143 – 15
 - Maximum Lug Width : 0.242" (6.1 mm)
 - Recommended Torque: 10 – 12 in. lbs. (1.1 - 1.4 N·m)
 - Screw Size: #6

Installation & Accessories

- Suggested product mounting hardware: #6 fastener, torque to be determined in end use application not to exceed 15 lb-in.

Drawing

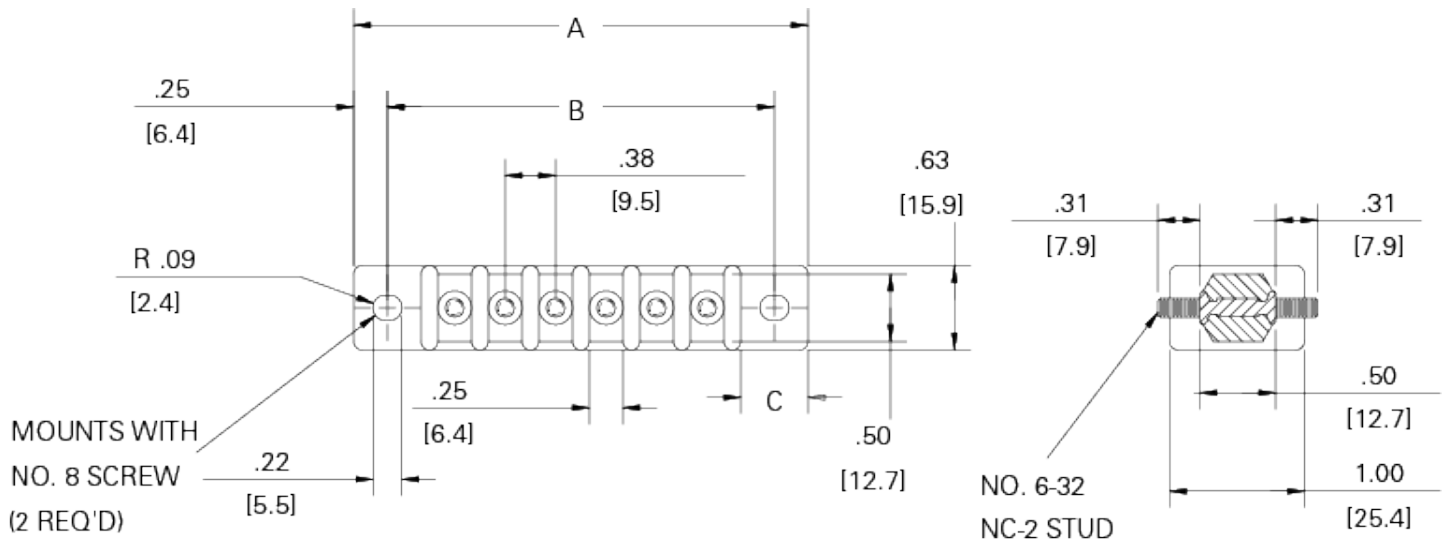

Type Designation	Dimensions		Terminal Nuts Required
	A	B	
11TB4	2.50	2.00	8
11TB6	3.38	2.88	12
11TB14	6.50	6.00	28