


Military Stud Class Terminal Block **15TBXXF**

Replace "XX" with 10 or 24 for number of poles.

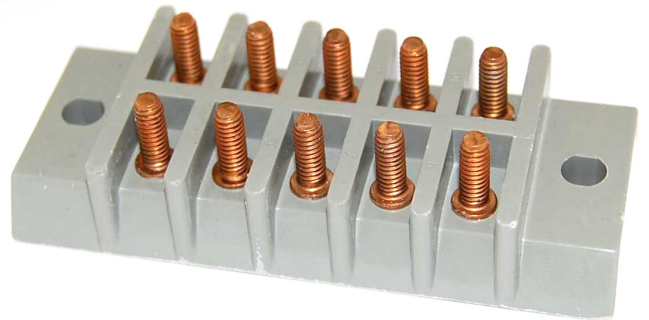

Wire Range

- For use with Listed Ring Fork or Spade Terminals

Electrical Ratings

- 30 Amps, 60Hz
- 600 Volts RMS
- 2200 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

Agency Compliance

- A-A-59125 / 19 , (supercedes MIL-T-55164 / 19)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

Material Information

- Insulator base:
 - MAI-60 in accordance with MIL-M-14
- Stud #8 - 32 NC-2: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9201848)


Termination Specifications

- Lug Information
 - MS17143 – 3
 - Maximum Lug Width : 0.307" (7.8 mm)
 - Recommended Torque: 16 – 18 in. lbs. (1.8 - 2.0 N·m)
 - Screw Size: #8

Installation & Accessories

- Suggested product mounting hardware: #6 fastener, torque to be determined in end use application not to exceed 15 lb-in.

Drawing

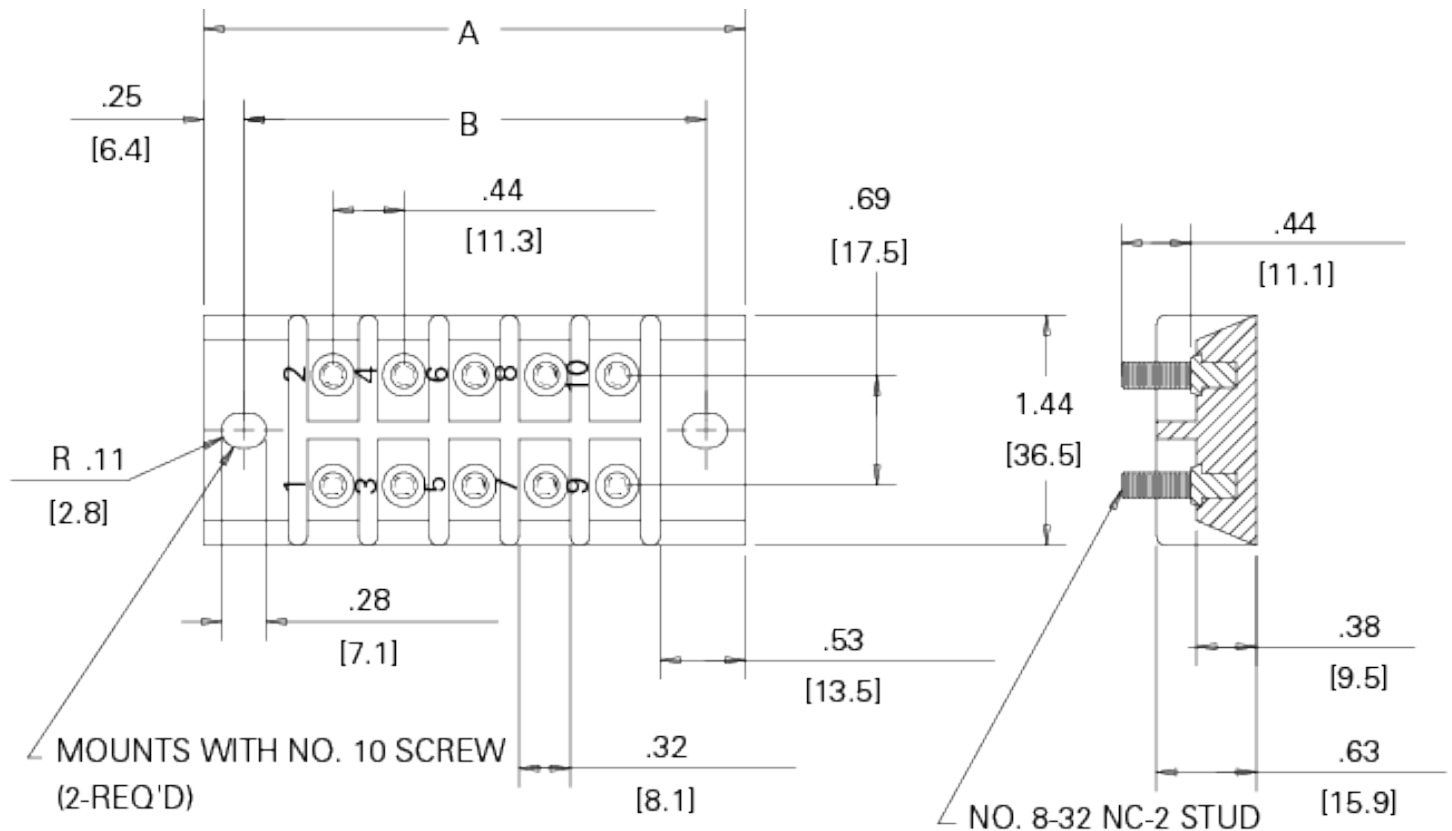

Type Designation	Dimensions		Terminal Nuts Required
	A	B	
15TB10	3.38	2.88	10
15TB24	6.50	6.00	24