


Military Stud Class Terminal Block **16TBXXF**

Replace "XX" with 04 or 10 for number of poles.

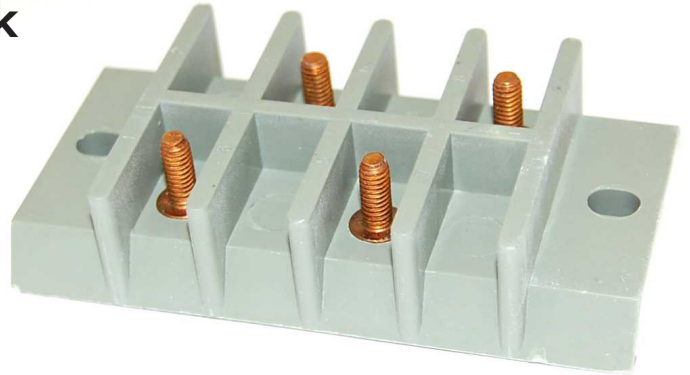

Wire Range

- For use with Listed Ring Fork or Spade Terminals

Electrical Ratings

- 40 Amps, 60Hz
- 1000 Volts RMS
- 3000 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

Agency Compliance

- A-A-59125 / 20 , (supercedes MIL-T-55164 / 20)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

Material Information

- Insulator base:
 - MAI-60 in accordance with MIL-M-14
- Stud #8 - 32 NC: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9201848)


Termination Specifications

- Lug Information
 - MS17143 – 3
 - Maximum Lug Width : 0.395" (10.0 mm)
 - Recommended Torque: 16 – 18 in. lbs. (1.8 - 2.0 N·m)
 - Screw Size: #8

Installation & Accessories

- Suggested product mounting hardware: #6 fastener, torque to be determined in end use application not to exceed 15 lb-in.

Drawing

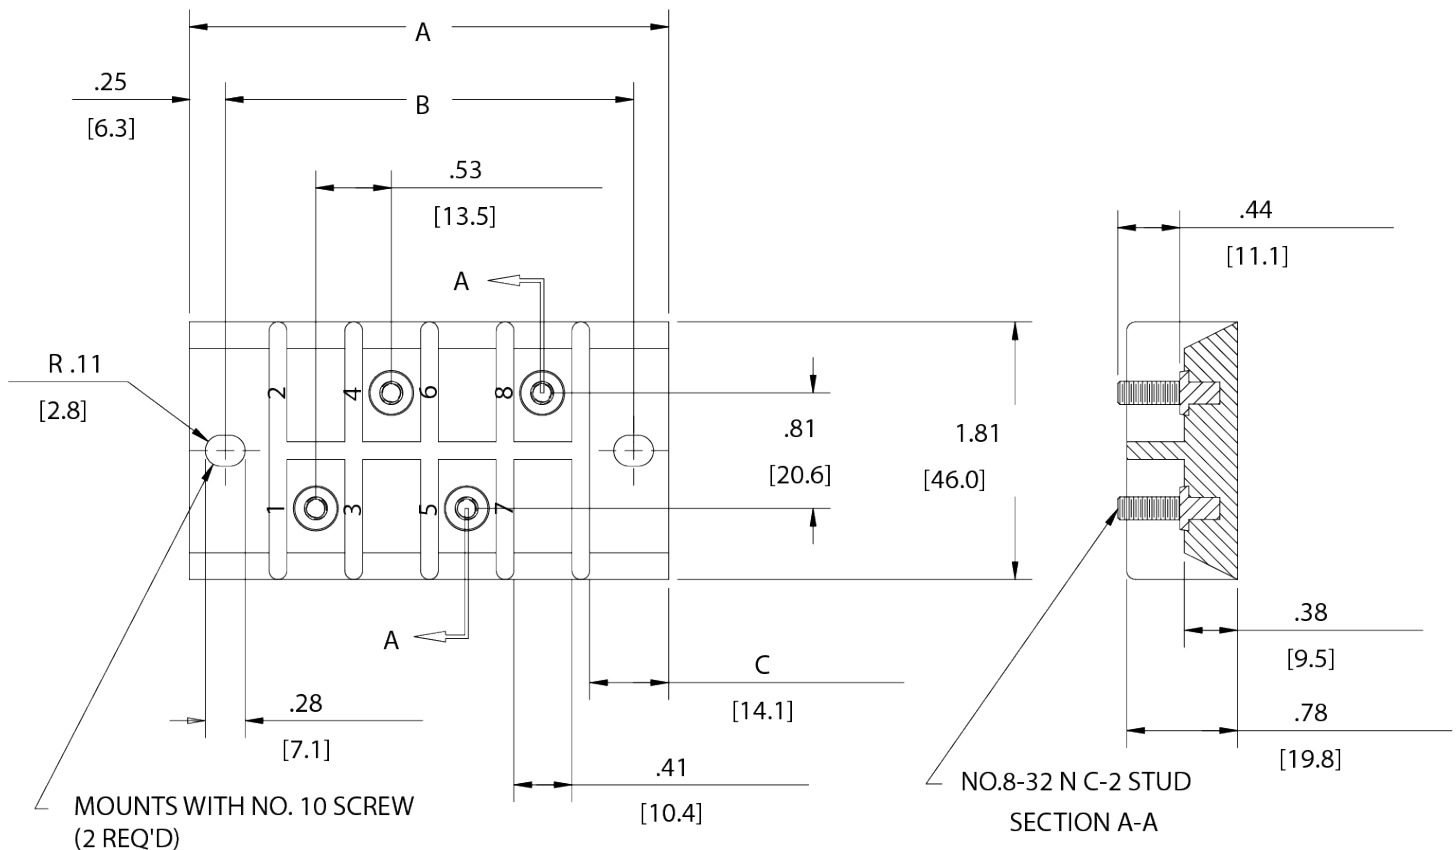

Type Designation	Dimensions			Terminal Nuts Required
	A	B	C	
16TB4	3.38	2.88	.56	4
16TB10	6.50	6.00	.53	10