

Military Stud Class Terminal Block **25TBXXF**

Replace "XX" with 02, 05, 06, 07, 09, 10, or 12 for number of poles.

Wire Range

- For use with Listed Ring Fork or Spade Terminals



Electrical Ratings

- 25 Amps, 60Hz
- 300 Volts RMS
- 1600 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

Agency Compliance

- A-A-59125 / 23 , (supercedes MIL-T-55164 / 23)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

Material Information

- Insulator base:
 - MAI-60 in accordance with MIL-M-14
- Stud #4 - 40 NC: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9202036)


Termination Specifications

- Lug Information
 - MS17143 – 17
 - Maximum Lug Width : 0.242" (6.1 mm)
 - Recommended Torque: 6 – 8 in. lbs. (0.7 - 0.9 N·m)
 - Screw Size: #4

Installation & Accessories

- Suggested product mounting hardware: #6 fastener, torque to be determined in end use application not to exceed 15 lb-in.

Drawing

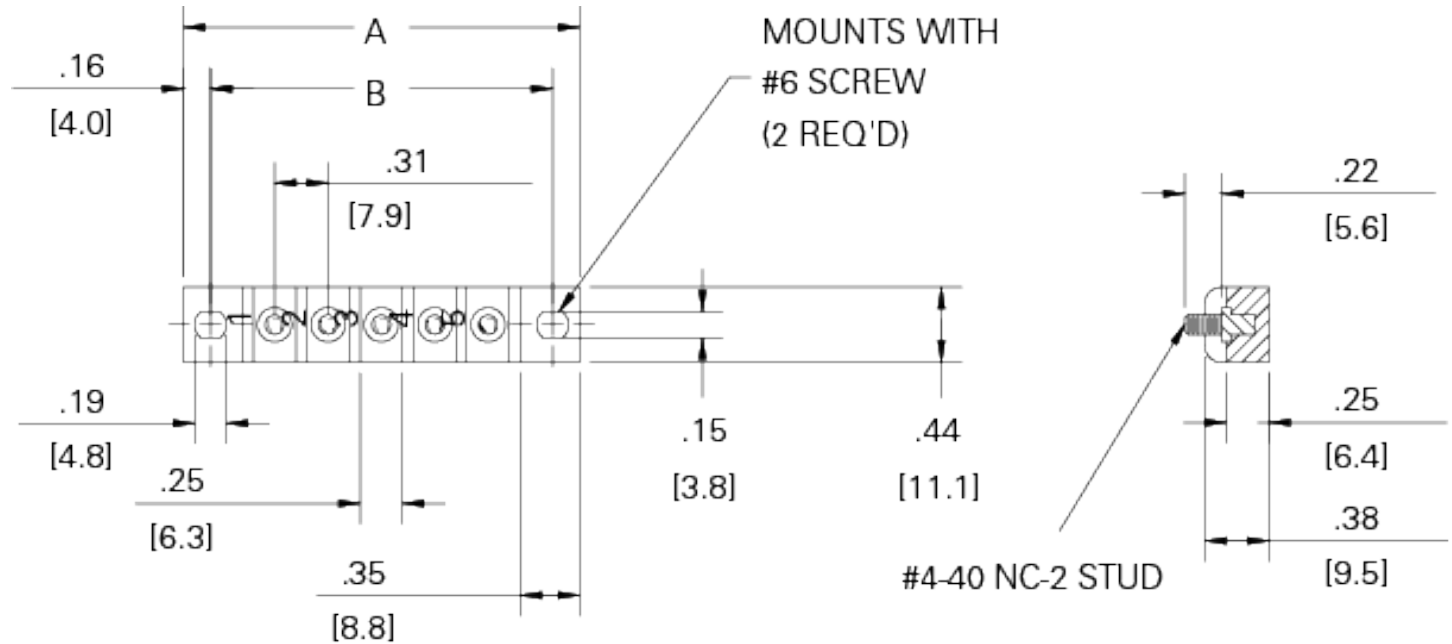

Type Designation	Dimensions		Terminal Nuts Required
	A	B	
25TB2	1.38	1.06	2
25TB5	2.31	2.00	5
25TB6	2.63	2.31	6
25TB7	2.94	2.63	7
25TB9	3.56	3.25	9
25TB10	3.88	3.56	10
25TB12	4.50	4.19	12