


Military Stud Class Terminal Block **3TB10F**

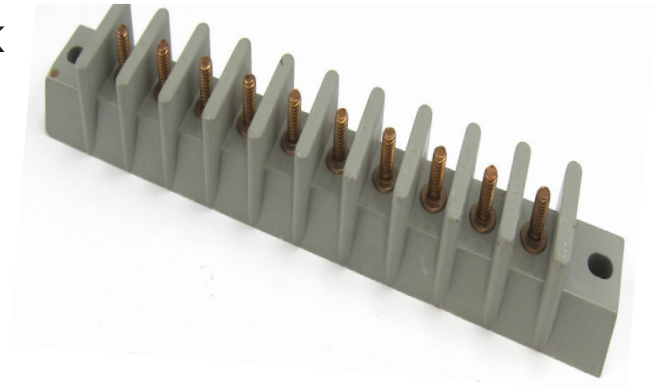

Wire Range

- For use with Listed Ring Fork or Spade Terminals

Electrical Ratings

- 45 Amps, 60Hz
- 600 Volts RMS
- 2200 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

Agency Compliance

- A-A-59125 / 9 , (supercedes MIL-T-55164 / 9)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

Material Information

- Insulator base:
 - MAI-60 in accordance with MIL-M-14
- Stud #8-32 NC: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9201848)

Termination Specifications

- Lug Information
 - MS17143 – 3
 - Maximum Lug Width : 0.395" (10.0 mm)
 - Recommended Torque: 16 – 18 in. lbs. (1.8 – 2.0 N·m)
 - Stud Size: #8

Installation & Accessories

- Suggested product mounting hardware: #10 fastener, torque to be determined in end use application not to exceed 20 lb-in

Drawing

