


## Military Stud Class Terminal Block **4TB08F**

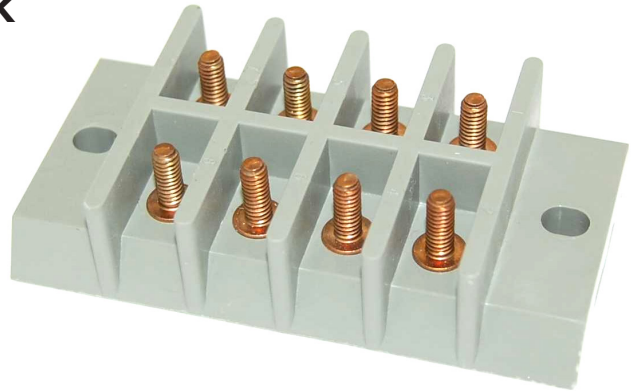

### Wire Range

- For use with Listed Ring Fork or Spade Terminals

### Electrical Ratings

- 40 Amps, 60Hz
- 600 Volts RMS
- 2200 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

### Agency Compliance

- A-A-59125 / 10 , (supercedes MIL-T-55164 / 10)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

### Material Information

- Insulator base:
  - MAI-60 in accordance with MIL-M-14
- Stud #8-32 NC: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9201848)


## Termination Specifications

- Lug Information
  - MS17143 – 3
  - Maximum Lug Width : 0.395" (10.0 mm)
  - Recommended Torque: 16 – 18 in. lbs. (1.8 – 2.0 N·m)
  - Screw Size: #8

## Installation & Accessories

- Suggested product mounting hardware: #10 fastener, torque to be determined in end use application not to exceed 20 lb-in

## Drawing

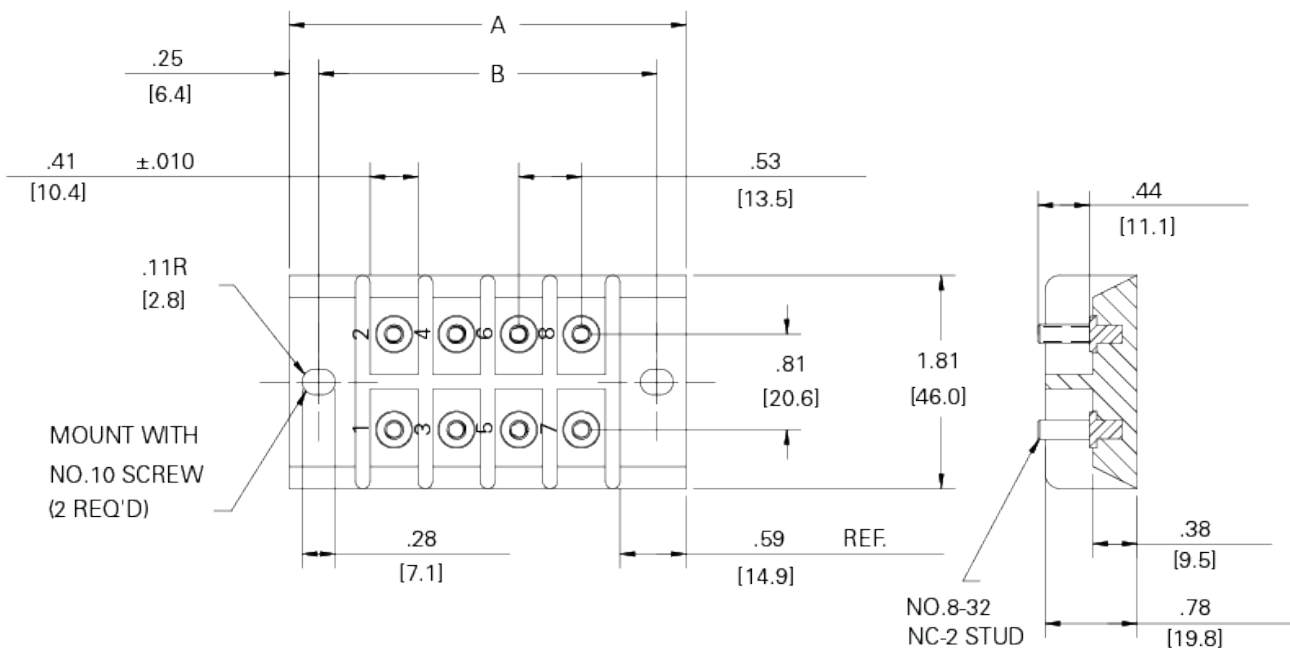

Catalog No.	No. Of Terminals	Dimensions		No. Of Nuts
		A	B	
4 TB 08 F	8	3.38	2.88	8
MM = Dim X 25.4				