


Military Stud Class Terminal Block **5TBXXF**

Replace "XX" with 08 or 10 for number of poles.

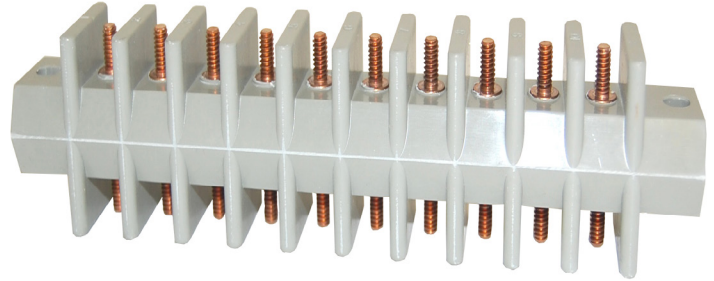

Wire Range

- For use with Listed Ring Fork or Spade Terminals

Electrical Ratings

- 50 Amps, 60Hz
- 600 Volts RMS
- 2200 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

Agency Compliance

- A-A-59125 / 11 , (supercedes MIL-T-55164 / 11)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

Material Information

- Insulator base:
 - MAI-60 in accordance with MIL-M-14
- Stud #8-32 NC: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9201848)


Termination Specifications

- Lug Information
 - MS17143 – 3
 - Maximum Lug Width : 0.395" (10.0 mm)
 - Recommended Torque: 16 – 18 in. lbs. (1.8 – 2.0 N·m)
 - Screw Size: #8

Installation & Accessories

- Suggested product mounting hardware: #6 fastener, torque to be determined in end use application not to exceed 20 lb-in.

Drawing

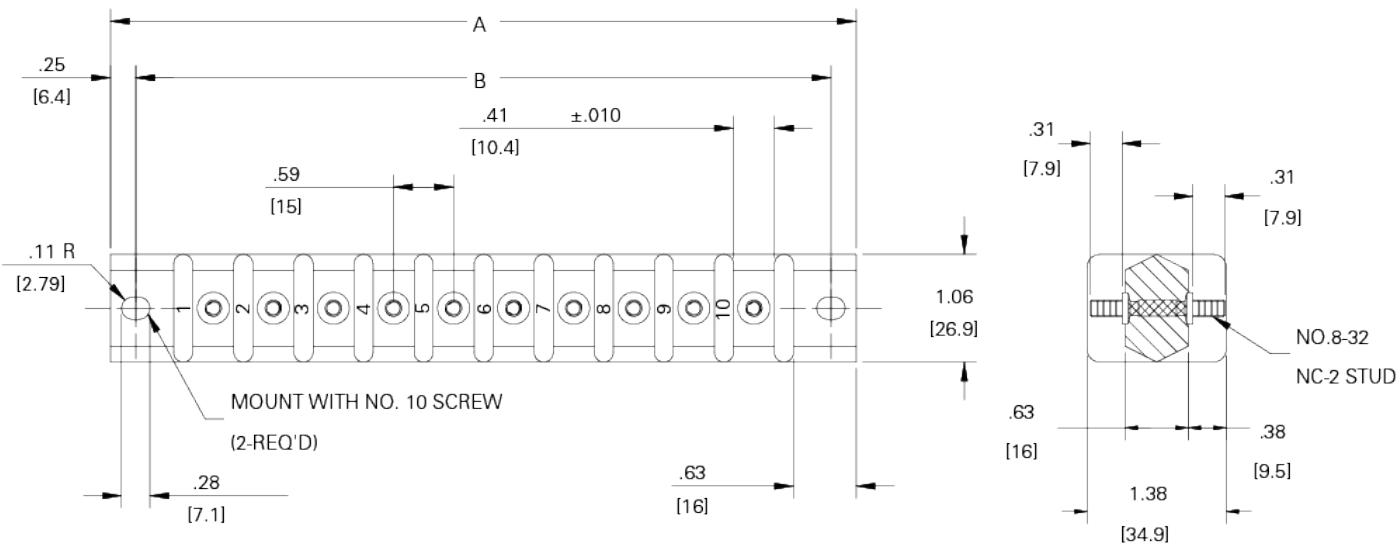

Catalog No.	No. Of Terminals	Dimensions		No. Of Nuts
		A	B	
5 TB 08 F	8	6.13	5.63	16
5 TB 10 F	10	7.38	6.88	20
MM = Dim X 25.4				