


Class J Fuse Holder

6J600AXB FBD

Replace "X" with 1 or 3 for number of poles

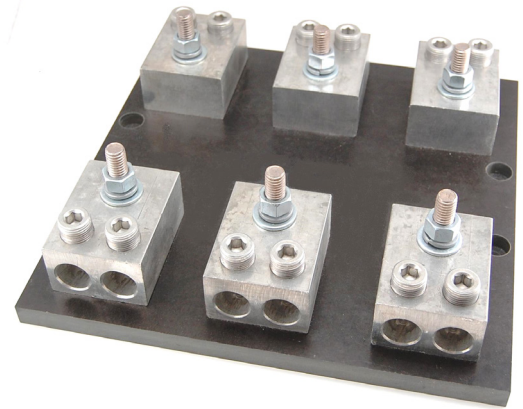

Wire Range

- (2) 500 kcmil - #4 AWG

Electrical Ratings

- 600A Max
 - Amperage rating based on maximum fuse rating for that physical size
 - Suitable for use with class J fuses 401 - 600 Amps
- 600 Volts AC
- Approved for 200,000 Amp Withstand Rating


Agency Compliance

- UL Listed, File E35113 (IZLT / IZLT7) for USA and Canada according to UL Std 4248-8 and CSA 22.2 No 4248.1 - 07
- RoHS Compliant

Material Information

- Insulator base:
 - Phenolic Laminate
 - Flammability rating of insulator base UL94 HB
 - Insulator base temperature rating: -35°C to 120°C (UL RTI)
- Fuse Clip: Aluminum alloy, tin plated
- Terminal set screws: Aluminum, tin plated
- All hardware: Steel, zinc plated

Termination Specifications

Line/Load Side	Stranded Wire Size	Torque	Wires/ Terminal	Wire Class (UL) ¹
	500kcmil - #2	42.4 N.m (375 in. lbs)	2	B, C
	400kcmil			G, H, I ¹

- 1 = CU Stranded Wire
- Wire strip length: 1 1/18"
- Terminal screw drive: 5/16 in. hex

Installation & Accessories

Fuse installation torque: 422 in. lbs

- Mounting
 - For use with #5/16 fastener
 - Recommended mounting torque not to exceed 50 in lbs

Drawing

