


Military Stud Class Terminal Block **9TBXXF**

Replace "XX" with 02 or 04 for number of poles.

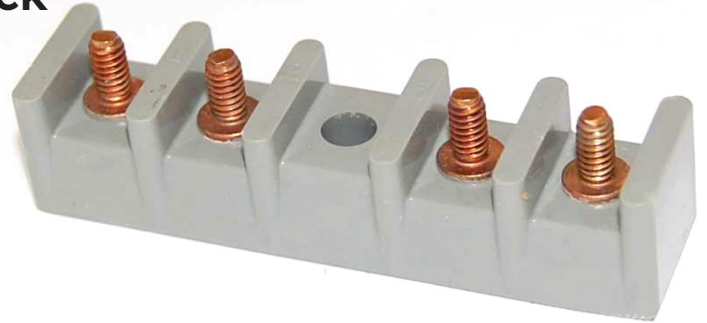

Wire Range

- For use with Listed Ring Fork or Spade Terminals

Electrical Ratings

- 35 Amps, 60Hz
- 300 Volts RMS
- 1500 Volts RMS Dielectric Withstanding Voltage
- Factory & Field Wiring

Agency Compliance

- A-A-59125 / 15 , (supercedes MIL-T-55164 / 15)
- MAI-60 in accordance with MIL-M-14
- RoHS Complaint

Material Information

- Insulator base:
 - MAI-60 in accordance with MIL-M-14
- Stud #6-32 NC: Brass, unplated
- Barrel Nut: Brass, unplated (provided loose) (Part no. 9201880)


Termination Specifications

- Lug Information
 - MS17143 – 17
 - Maximum Lug Width : 0.307" (7.8 mm)
 - Recommended Torque: 10 – 12 in. lbs. (1.1 - 1.4 N·m)
 - Screw Size: #6

Installation & Accessories

- Suggested product mounting hardware: #6 fastener, torque to be determined in end use application not to exceed 15 lb-in.

Drawing

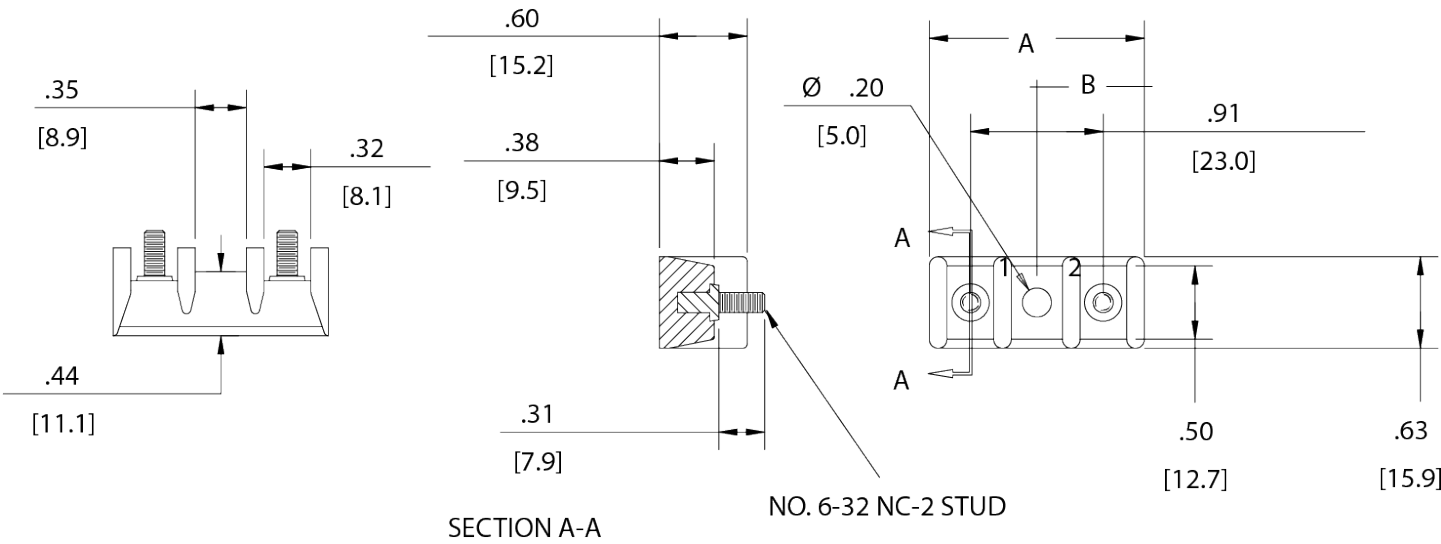

Type Designation	Dimensions		Terminal Nuts Required
	A	B	
9TB2	1.47	.73	2
9TB4	2.38	1.19	4